Projecta BV
P.O. Box 191, 6000 AD Weert
Franklinstraat 14
6003 DK Weert
The Netherlands
Tel: +31 (0) 495580840
Fax: +31 (0) 495580845
sales@projectascreens.com
www.projectascreens.com

PROJECTA
Screens for Professionals

Specification Data Sheet

Pro-Lift Pivot

Suggested specifications

The Pro-Lift is an electrically operated projector lift 230 volt (50Hz) with a usage of no more than 3 Ampere for projectors weighing up to 11 kg. The mount shall be a fabricated mild steel design and consist of a 14-gauge welded support frame, 14-gauge welded tilting frame, 18-gauge ceiling tile holder and 18-gauge ceiling tile trim piece. Product shall have a prewired 120V AC grounded duplex receptacle and a prewired built-in switch for installer operation. Product shall have a commercial powder coat white finish. Designed to mount in suspended ceiling or drywall ceiling. Front to back, left to right, vertical, and tilt projector adjustments. Complete with a universal projector mount. To be complete with three position control switch with cover plate. Optional low voltage, radio frequency or infrared, remotes available.

Dimensions

Type	Dimension	Dimension	Dimension	Dimension	Dimension	Dimension
	A	B	C	D	E	F
Pro-Lift Pivot 65	43	33	65	40	40	33
Pro-Lift Pivot 82	55	41	82	52	52	42

Type	Load Capacity	Net Weight	Shipping Weight
	kg	kg	kg
Pro-Lift Pivot 65	11	19	21
Pro-Lift Pivot 82	11	21	23

Dimensions

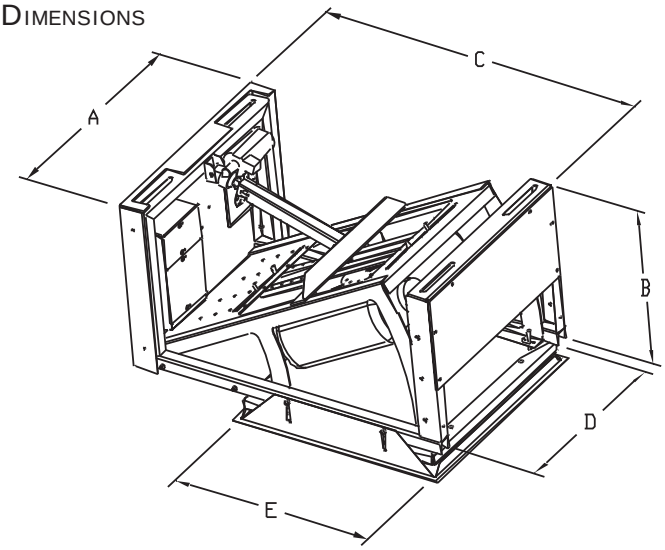

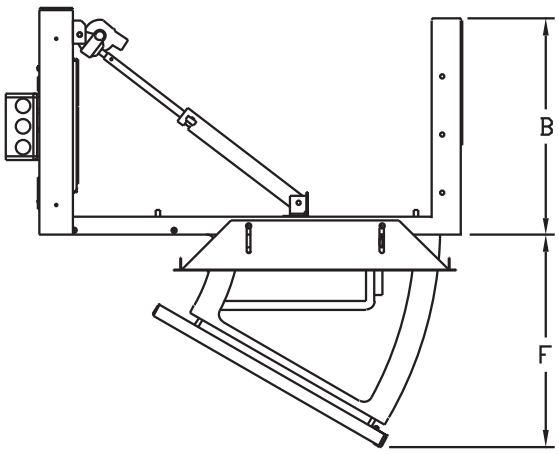

Project: _____

_____

Architect: _____
Phone: _____
Contractor: _____
Phone: _____
Supervisor: _____
Phone: _____
Supplier: _____
Date: _____
Revised: _____

Specifications subject to change.